


Trimless W12091LED
Trim 12091LED

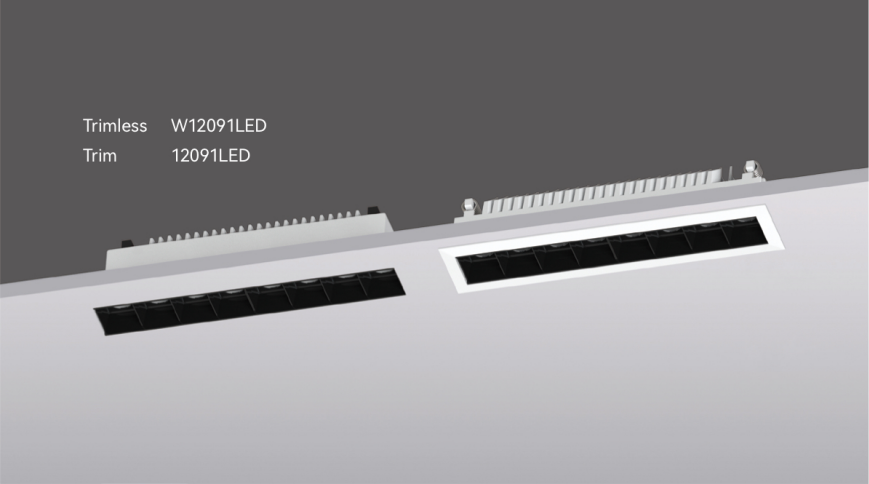

Quickinfo

GENERAL
Recessed
IP20

LED
20W
2700K, 3000K, 4000K, 5000K, TW
50000h@L80
CRI ≥ 90
SDCM: 5

OPTICAL
Direct illumination
Beam angle 15° / 29° / 50° / 16° x36°
Optical accessories

ELECTRICAL
NON-DIM
PHASE
1-10V
DALI
BLUETOOTH

PHYSICAL
Aluminum



Description

VELA linear spotlight, 8 high power LED chips, because of its long and narrow shape, can help to increase the visual guidance and improve the spatial extension. Tunable White allows the colour tem-perature to be continuously adjusted from warm light to cool light.

Applications

Showrooms, Galleries, Retail stores, Restaurants, Museums, Hotels, Bars, Shopping centers, Large architectures and Administration buildings.

Features



Standard configuration

COLOUR TEMPERATURE
2700K
3000K

CONTROL
NON-DIM

OPTICAL
15° / 29° / 50° / 16° x36°

COLOUR(housing)
White

COLOUR(reflector)
Black

Extended configuration

COLOUR TEMPERATURE
4000K
5000K

CONTROL
DALI, PHASE, 1-10V

COLOUR(housing)
Black

COLOUR(reflector)
White, Gold

Options on request

COLOUR TEMPERATURE
TW(2700K-5700K)


CONTROL
BLUETOOTH

Parameters


POWER VF CURRENT CCT LUMINOUS FLUX
20W 24V 700mA 2700K 1132-1305 lm
3000K 1184-1398 lm

Test standards:
NICHIA LED, CRI-90, tolerance range of electrical and optical parameters: ±10%.

Light Distribution



Light effect and planning aid

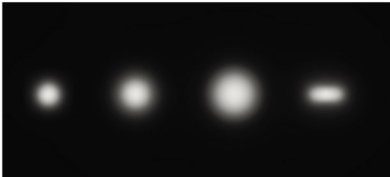

Emphasis of objects or architectural elements Wide-beam illumination of larger objects or spatial zones.

Mounting dimension

